

GIFAS BASICLINE

Energy distribution
and Lighting systems

**STOCK GOODS
PROMPT DELIVERY**

GIFAS
ELECTRIC



Extension cables - Basicline series

The weather-resistant, flexible, heavy-duty rubber hose cable of type H07RN-F in black is used for extension cables in the Basicline series.

This cable is approved for dry and wet areas, as well as outdoors.

Equipped with protective contact plug, protective contact coupling, triple protective contact coupling or CEE connector 5x16A / 5x32A in construction site quality, protection class IP44.

Typical areas of application of the Basicline series – construction sites, maintenance work, repair work, temporary arrangements, agricultural areas, events, etc.



Schuko extensions - IP44



10 m rubber hose line H07RN-F 3G1,5 incl. protective contact plug and protective contact coupling 16A 250VAC IP44

118048	€ 29,90
---------------	----------------

25 m rubber hose line H07RN-F 3G1,5 incl. protective contact plug and protective contact coupling 16A 250VAC IP44

135485	€ 54,10
---------------	----------------



10 m rubber hose line H07RN-F 3G1,5 incl. protective contact plug and triple schuko coupling 16A 250VAC IP44

135486	€ 43,30
---------------	----------------

25 m rubber hose line H07RN-F 3G1,5 incl. protective contact plug and triple schuko coupling 16A 250VAC IP44

135487	€ 67,50
---------------	----------------

CEE extensions - IP44



10 m rubber hose line H07RN-F 5G2.5 incl. CEE plug and CEE coupling
5x16A 400VAC IP44

135488 € 64,30

25 m rubber hose line H07RN-F 5G2.5 incl. CEE plug and CEE coupling
5x16A 400VAC IP44

135489 € 112,00



10 m rubber hose line H07RN-F 5G4 incl. CEE plug and CEE coupling
5x32A 400VAC IP44

135490 € 85,00

25 m rubber hose line H07RN-F 5G4 incl. CEE plug and CEE coupling
5x32A 400VAC IP44

135491 € 166,00

Wall distributor - Basicline series

The GIFAS distributors of the Lightbox KL series are suitable for indoor and outdoor use.

The high-quality ABS/PC plastic housing has a wide range of positive properties. Such as impact-resistant, dimensionally stable, temperature-resistant -25°C - +40°C, weather-resistant, UV-resistant, aging-resistant, good insulation properties and is corrosion-free.

They can be used universally and are used where quality, robust housing and absolute reliability are important, such as in industry, commerce, workshops, agriculture, households, public buildings, leisure, sports, camping...

Wall distributor - IP44

- Housing plastic, halogen-free, color RAL 7035
- Gasket: foamed polyurethane gasket
- Protection class II
- Impact Proof IK08
- Clear Window 12TE (KLN4) or 18TE (KLN5)
- Type of protection up to IP65 possible

Plastic Lightbox series KLN4 -
1x M32 cable gland attached
W x H x D = 310 x 435 x 149mm

1/Plastic-CEE 5x32A 400V	1/LS 3pol. 32A
1/Plastic-CEE 5x16A 400V	1/LS 3pol. 16A
3/Schuko 16A 230V	2/LS 1pol. 16A
	1/FI 40/0,03/4P Typ A therm.



136301

€ 287,00

Plastic Lightbox series KLN5 -
1x M32 cable gland attached
W x H x D = 420 x 435 x 149mm

1/Plastic-CEE 5x32A 400V	1/LS 3pol. 32A
1/Plastic-CEE 5x16A 400V	1/LS 3pol. 16A
3/Schuko 16A 230V	3/LS 1pol. 16A
	1/FI 63/0,03/4P Typ A therm.



152191

€ 335,00



Portable solid rubber distributor - IP44

- Housing solid rubber halogen-free, with foamed polyurethane gasket seal
- Portable solid rubber distributor – readily wired for operation
- Type of protection up to IP65 possible

Portable solid rubber distributor series 12HP -
2m connection cable 5x2,5mm² with plastic-CEE-plug 5x16A 400V
W x H x D = 125 x 125 x 76mm



1/Plastic-CEE 5x16A 400V unfused
3/Schuko 16A 230V unfused

138163 € 98,00

Portable solid rubber distributor series 62HP -
2m connection cable 5x2,5mm² with plastic-CEE-plug 5x16A 400V
W x H x D = 280 x 276 x 230mm



2/Plastic-CEE 5x16A 400V unfused
5/Schuko 16A 230V unfused
1/FI 40/0,03/4P. Typ A

138182 * € 252,00

Portable solid rubber distributor series 62HP -
2m connection cable 5x4 mm² with plastic-CEE-plug 5x32A 400V
W x H x D = 280 x 276 x 230 mm



1/Plastic-CEE 5x32A 400V unfused
2/Plastic-CEE 5x16A 400V 1/LS 3pol. 16A
3/Schuko 16A 230V 2/LS 1pol. 16A
1/FI 40/0,03/4P. Typ A

136942 * € 286,00

* according ÖVE/ÖNORM EN61439-4

Portable distributor - Basicline series

- Solid rubber-Housing = special mixture of butyl rubber
- Superior stability: shatterproof, impact-resistant, stable shape and resistant to ageing
- Integrated wall mounting provides protective insulation - separated from the wired area
- Captive stainless steel top screws
- No corrosion
- No condensation (even where there are significant temperature fluctuations)
- Dust-tight and protected against water jets (IP65)
- High temperature resistance from -30° up to +80°C
- Resistant to chemicals (oils and fat, many acids and caustics)
- Weather-, UV- and ozone-resistant
- Self-extinguishing, halogen and silicone-free
- Low-smoke in the event of fire - no release of caustic or toxic substances
- Tested quality -



LED lighting - Basicline series

- Lower power consumption with good luminous efficiency
- Full luminous flux is available immediately
- Minimal temperature development
- Extremely resistant to switching (> 1 million)
- Maintenance-free
- No UV/IR-radiation
- Not sensitive to impact and vibrations

High performance spotlights PLAZA - IP65

- Aluminum housing with rustproof polyester coating
- Cover PMMA
- Integrated soft starter (no increased inrush current)
- Emission characteristic: 60° with individual optics
- LED Power: 400W = 48.000lm
- Color temperature: 5.000K
- Temperature range for operation: -40°C to +50°C
- Type of protection: IP65
- Dimensions: 565 x 360 x 240 mm (W x H x D)
- Weight: approx. 11,65 kg



Floodlight 400W 230V - incl. 2 pcs. Hirschmann plugs (installed) and 2 pcs. Hirschmann couplings (enclosed)

126807	€ 745,00
---------------	-----------------

Solid rubber Y-Adapter - with installed Hirschmann plug and 2 Pcs. Hirschmann couplings

119021	€ 97,90
---------------	----------------

15 m Proflexx-extensions - with mounted solid rubber Schuko plug and Hirschmann coupling

101278	€ 76,00
---------------	----------------

30 m Proflexx-extensions - with mounted solid rubber Schuko plug and Hirschmann coupling

103941	€ 103,00
---------------	-----------------

Rail Work Light SK I - IP54

- Plastic housing yellow/black with edge protection made of thermo-plastic elastomer, incl. handle and stirrup
- Cover: Plastic (Polycarbonat) opal
- Integrated on-off switch
- LED Power: 36W = 4000lm
- Color temperature: 5.000K
- Type of protection: IP54
- Dimensions: 305 x 320 x 110 mm (W x H x D)
- Weight: approx. 2,9kg



Rail Work Light SK I with 3x Schuko socket 16A 230V - 5m connection cable and schuko plug 16A 230V

130226	€ 158,00
---------------	-----------------



LineLED Pro 3 - IP65

- Moisture-proof diffuser light for demanding applications in industrial plants, underground car parks as well as refrigerated and storage areas
- Housing material: GFK
- Cover: PC matt
- Luminous angle: 120°
- Color temperature: 5.000K
- CRI Index: Ra >80
- L70/B30: 50.000h
- Temperature range for operation -15°C to +35°C
- Type of protection: IP65
- Degree of protection: IK08
- Through-wiring 5x2.5 mm²
- Locks and fasteners made of stainless steel



LineLED Pro 3 - 24W 220-240VAC

Luminous flux: 3.000lm
Weight: ca. 1,6kg
Dimensions: 600 x 100 x 123mm (L x W x H)

133579 € 76,70

LineLED Pro 3 - 36W 220-240VAC

Luminous flux: 4.500lm
Weight: ca. 2,8kg
Dimensions: 1200 x 100 x 123mm (L x W x H)

133567 € 98,90

LineLED Pro 3 - 50W 220-240VAC

Luminous flux: 6.250lm
Weight: ca. 3,9kg
Dimensions: 1500 x 100 x 123mm (L x W x H)

133568 € 125,00

LineLED Pro 3 - 65W 220-240VAC

Luminous flux: 8.125lm
Weight: ca. 3,9kg
Dimensions: 1500 x 100 x 123mm (L x W x H)

133719 € 133,00

LineLED Pro 3 - 65W 220-240VAC - with emergency light function

including emergency light battery - LiFePO4 6.4V - (up to 1h emergency light at 10% light output)
Luminous flux: 8.125lm
Weight: ca. 4,3kg
Dimensions: 1500 x 100 x 123mm (L x W x H)

138266 € 205,00

Max. number of lights per circuit breaker

LineLED PRO3	circuit breaker		
	B16A	C16A	B20A
24W	32 pc.	60 pc.	40 pc.
36W	32 pc.	60 pc.	40 pc.
50W	23 pc.	38 pc.	28 pc.
65W	17 pc.	30 pc.	21 pc.

LED lighting - Basicline series



- Lower power consumption with good luminous efficiency
- Full luminous flux is available immediately
- Minimal temperature development
- Extremely resistant to switching (>1 million)
- Maintenance-free
- No UV/IR-radiation
- Not sensitive to impact and vibrations



CONTACT US

GIFAS
ELECTRIC

www.gifas.com

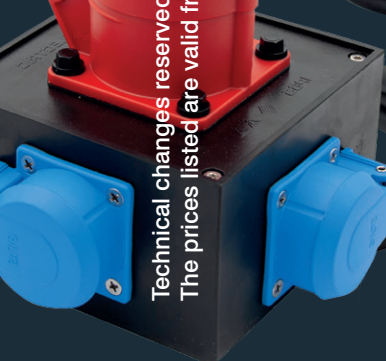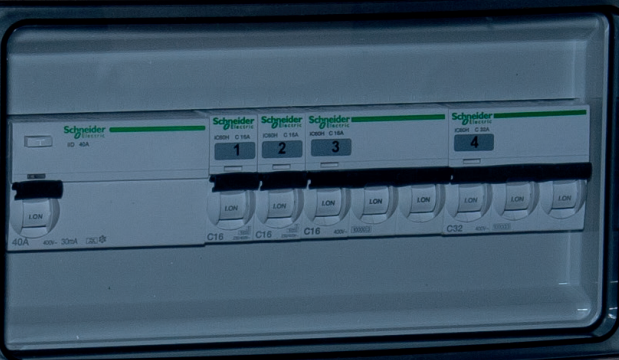

Technical changes reserved. VO 2023
The prices listed are valid from April 1st, 2023, until revoked.



Scan the QR code and find out more about GIFAS ELECTRIC and systematic quality!

GIFAS
ELECTRIC

GIFAS ELECTRIC Gesellschaft m.b.H.
Strass 2
5301 Eugendorf
AUSTRIA

+43 6225 7191 - 0
+49 8654 404 2000
verkauf@gifas.at
www.gifas.at

